


INTRODUCTION

This guide provides supplemental instructions for your Hurry Home Quilt kit. It includes updated cutting directions for the six house color combinations featured in this sample, as well as revised fabric requirements for the distinctive 9-patch sashing and accompanying construction diagrams. You'll need to reference both this guide and your original pattern, as they are designed to be used together. Please read all instructions carefully before starting.*

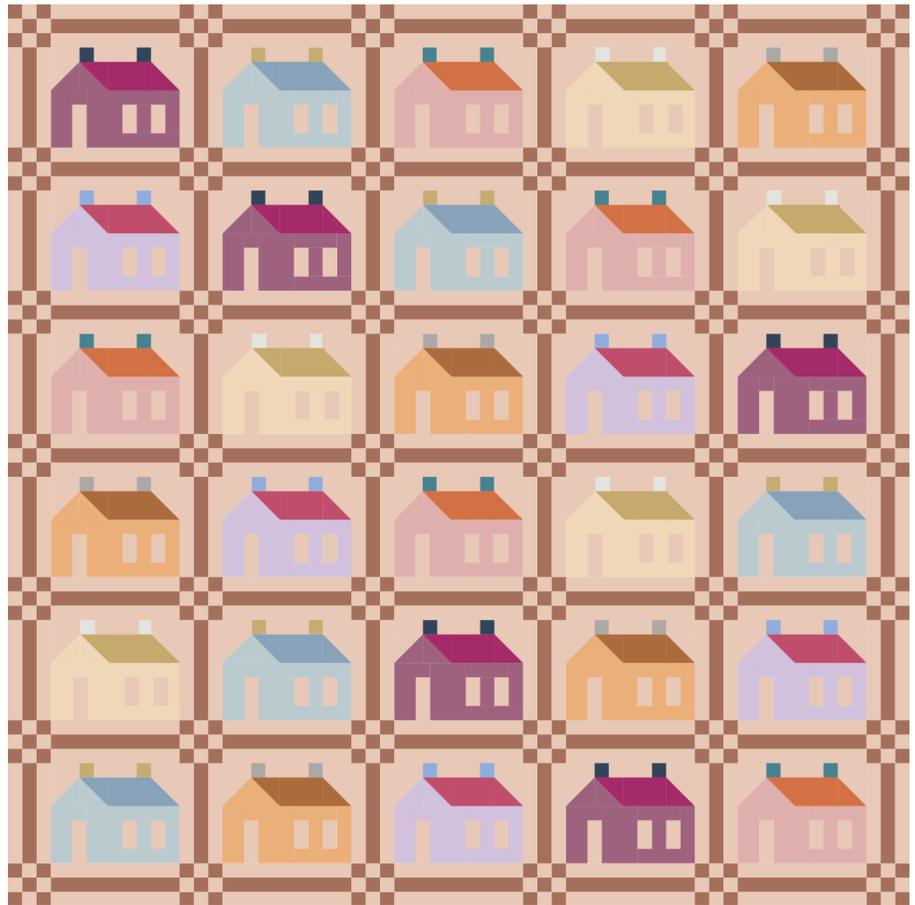

*Seam allowance is 1/4" throughout, sew right sides together, and follow all pressing instructions.

CUTTING INSTRUCTIONS – HOUSE FABRICS (Amendment)

Refer to page 15 of your Hurry Home Quilt pattern. Because this version uses 6 color combinations instead of 15, please follow the amended cutting instructions for the houses below.

Houses - Fabric B

Cut the following:

- (5) B1
- (10) B2
- (5) B3
- (10) B4
- (10) B5
- (5) B6

Roofs - Fabric C

Cut the following:

- (5) C1
- (5) C2

Chimneys - Fabric D

No changes—cut as directed in the original pattern.

Important Note: Follow all house assembly instructions as outlined in your Hurry Home Quilt pattern. For the 9-patch sashing, please **do not cut** the A6, A7, and A8 background pieces as shown on page 15 of your Hurry Home Quilt pattern. Follow the updated instructions below instead.

9-PATCH SASHING CUTTING INSTRUCTIONS

2 yards Sashing/Bourbon	(30) 2¼" WOF
3 yards Background/ Cobblestone	(45) 2¼" x WOF

SEWING INTRUCTIONS

1. Sew a Background WOF strip to a Sashing WOF strip. Press the seam toward the sashing strip. **Fig. 1**
2. Sew a Background WOF strip to the sashing side of the strip set. **Fig. 2** Press the seam toward the sashing strip. **Fig. 3**
3. Repeat Steps 1 and 2 until you have 20 strip sets. Set aside.
4. Sew a Sashing WOF strip to a Background WOF strip. Press the seam toward the sashing strip. **Fig. 4**
5. Sew a Sashing WOF strip to the Background side of the strip set. **Fig. 5** Press the seam toward the sashing strip. **Fig. 6**
6. Repeat Steps 4 and 5 until you have 5 strip sets. Set aside.

Fig. 1



Fig. 2




Fig. 3



Fig. 4




Fig. 5



Fig. 6



SUB-CUTTING YOUR STRIP SETS

1. Take 18 of the Background/Sashing/Background strip sets previously set aside. Sub-cut each strip set into two 9¼" units, two 10" units and one 2¼" unit. **Fig. 7** Set aside.
2. Using the remaining 2 Background/Sashing/Background strip sets, set aside earlier, sub-cut into twenty-four 2¼" units. **Fig. 8** Set aside.
3. Take the 5 Sashing/Background/Sashing strip sets set aside earlier and sub-cut them into eighty-four 2¼" units. **Fig. 9** Set aside.

Fig. 7

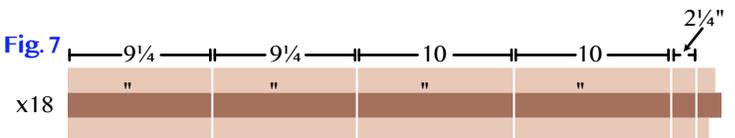


Fig. 8



Fig. 9



TOTAL NUMBER OF UNITS NEEDED

(36) 9¼" Vertical Sashing Units

(35) 10" Horizontal Sashing Units

(42) 2¼" Background/Sashing/Background Units

(84) 2¼" Sashing/Background/Sashing Units

ASSEMBLE THE NINE PATCHES

1. Sew one Sashing/Background/Sashing 2¼" unit to one Background/Sashing/Background 2¼" unit. Nest and pin the seams to maintain alignment. Press the seam toward the Sashing/Background/Sashing unit. **Fig. 10**
2. Repeat the process from Step 1 by sewing a Sashing/Background/Sashing 2¼" unit to the right side of the unit to complete the 9-patch. **Fig. 11**
3. Repeat Steps 1 and 2 until you have forty-two nine-patch units. **Fig. 12**

Fig. 10




Fig. 11





Fig. 12

x42



ASSEMBLE THE HOUSE ROWS

1. Sew one 9¼" strip set to the right side of each house block. Press the seam toward the sashing. **Fig. 13**
2. Lay out your House/Sashing blocks in 6 rows of 5 blocks, then sew a 9¼" strip set to the left side of the first house in each row. **Fig. 14**
3. Sew each House/Sashing block to the next to form each row. Press all seams toward the sashing units. **Fig. 15**

Fig. 13


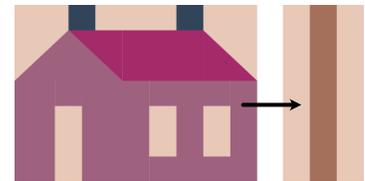


Fig. 14



Fig. 15

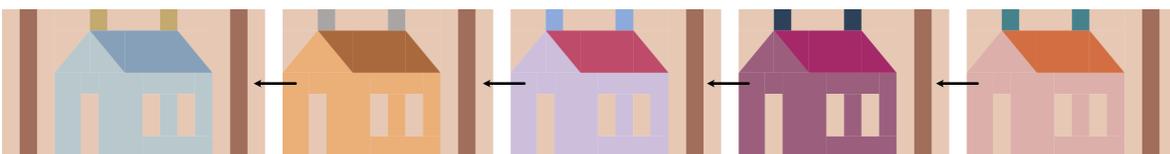


ASSEMBLE THE SASHING ROWS

1. Sew one 9-patch unit to the right side of each 10" strip set. Nest and pin the seams to assure alignment. Press the seam toward the sashing. [Fig. 16](#)
2. Sew a 9-patch block to the left side of seven of the 9-patch/Sashing units. Nest and pin the seams to assure alignment. Press the seams toward the sashing. [Fig. 17](#)
3. Starting with a 9-patch/Sashing/9-patch unit, sew four Sashing/9-patch units to its right to complete one sashing row. Nest and pin the seams to assure alignment. Press all seams toward the sashing. [Fig. 18](#)
4. Repeat Step 3 to create a total of seven sashing rows.



[Fig. 18](#)

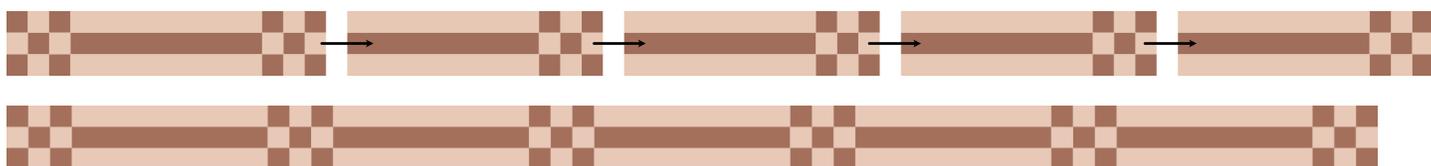

ASSEMBLE THE QUILT TOP

Sew the rows together as shown in [Fig. 19](#). Nest the seams and pin generously to prevent shifting along the long rows. Press seams open—and enjoy watching your neighborhood of houses come together!

[Fig. 19](#)

